


Using Calisto™ Pro with Cisco® IP Communicator


Before using the Plantronics Calisto Pro with the Cisco IP Communicator softphone, please read the Calisto Pro user guide and make sure you have installed the PerSonoCall software from the Calisto Pro CD. Also, please make sure that the Calisto Pro is connected to your PC via the USB port.

Follow the steps below to make sure you have the correct settings to receive calls with the Calisto Pro using the Cisco IP Communicator.

1. Launch Plantronics PerSonoCall
2. Make sure that Cisco IP Communicator is selected under “Softphone Status” and then click **Apply** and then **OK**.

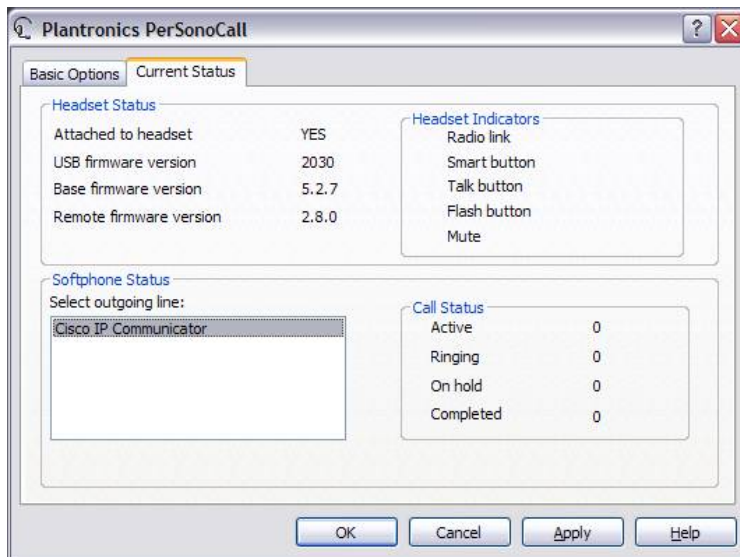

3. Now you will need to adjust your default sound settings. Go into you PC’s “Control Panel” and then select “Sounds and Audio Devices”. On the “Voice” tab select your default device (make sure that Calisto Pro is **not** selected) for both “Voice playback” and “Voice recording”. Click **Apply** and then **OK**.

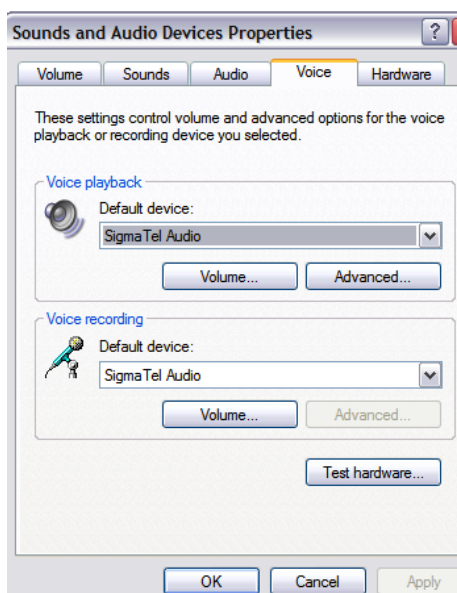

- Now you are ready to launch the Cisco IP Communicator softphone application
- Click on the “Menu” button (1st icon on the top right of the screen)



- Choose “Audio Tuning Wizard”





- Read the instructions displayed on the screen and then click **Next**
- On the “Select Audio Devices” screen you must set the “Plantronics Calisto Pro Series” as the default for all devices



9. The next two screens of the Cisco softphone audio tuning wizard are **not** applicable for the Calisto Pro Series device.

Click **Next** to continue past these two screens:

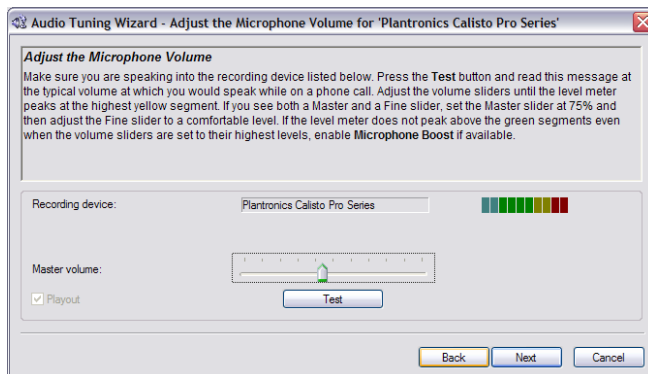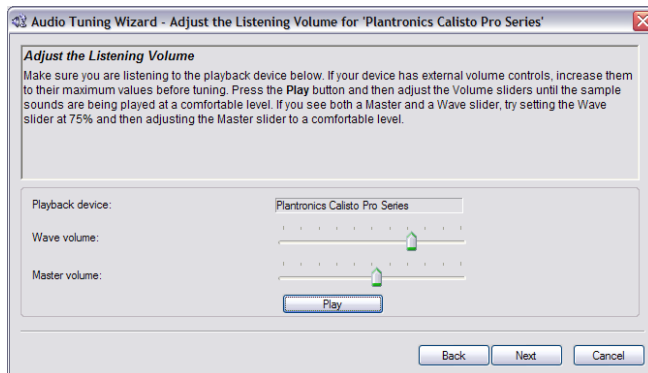

Note: Some steps of the Cisco softphone "Audio Tuning Wizard" are not applicable because of how the Calisto Pro interfaces with the softphone (i.e. no outgoing call control functionality from the Calisto Pro headset or handset).

10. On the final page, click **Finish**



11. Incoming calls through the Cisco softphone can now be answered with the Calisto Pro headset or headset (to conduct calls using headset, make sure headset is within 33ft of the Calisto handset).

Note: All outgoing call dialing must originate from the Cisco softphone screen. Incoming and outgoing calls can be answered or terminated via the Calisto Pro headset or headset.